

## PRODUCT

# Smooth Antistatic Matting - 3 Layer

## TECHNICAL DATASHEET

Our 3 Layer Antistatic Mat provides excellent ESD protection. Suitable for both ESD workbenches and EPA floor areas. The mat is easy to clean and has excellent lay flat properties for a flat work surface. It is also supplied with a 10mm press stud in each corner.


This matting is designed to be volume conductive across the whole surface layer and has a buried conductive middle layer which improves the electrical properties by acting as a fast track to move static charge to ground. It is specifically developed so that when the top surface is “dirty” the mat can be flipped over with no loss of performance, which can double the usable life span.

## FEATURES

- Great value ESD Bench Matting made from antistatic (conductive) and static-dissipative materials with synthetic rubber
- All bench mats come with 10mm studs in each corner

## LAYERS

- 3 layer structure
- Top and bottom surface layer is a 1.25mm thick static dissipative layer
- Middle layer is a 0.5mm conductive layer

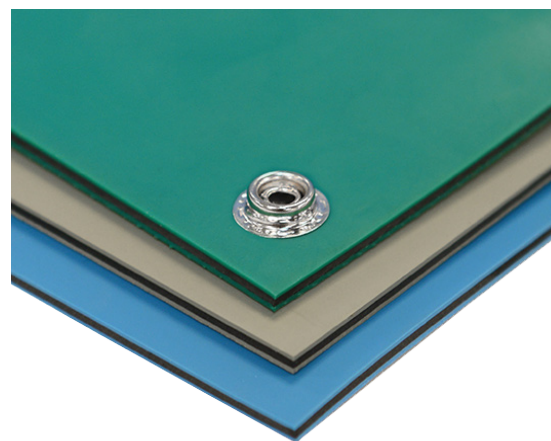

## COLOURS



GREEN




GREY



BLUE

Static Dissipative Layer  
Conductive Layer  
Static Dissipative Layer

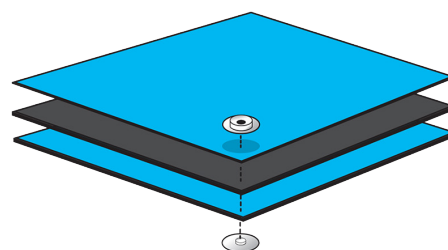

To request a quotation or for more information, please call **+44 (0)1473 836200**  
email [info@antistat.co.uk](mailto:info@antistat.co.uk) or visit [www.antistat.co.uk](http://www.antistat.co.uk)

IMPORTANT: This data sheet and its contents (the "Information") belong to Antistat or are licensed to it. No licence is granted for the use of it other than for information purposes in connection with the products to which it relates. No licence of any intellectual property rights is granted. The Information is subject to change without notice and replaces all data sheets previously supplied. The Information supplied is believed to be accurate but Antistat assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any use made of it. Users of this data sheet should check for themselves the Information and the suitability of the products for their purpose and not make any assumptions based on information included or omitted. Liability for loss or damage resulting from any reliance on the Information or use of it (including liability resulting from negligence or where Antistat was aware of the possibility of such loss or damage arising) is excluded. © 2024 Antistat.

### Grounding

Sufficient ground cords should be used to reliably meet EN 61340-5-1 Table 3, less than  $1 \times 10^9$  ohms for working surfaces. The industry recommendation is that continuous runs of ESD matting should be grounded at 10ft intervals to allow proper charge decay rates. Each individual ESD mat should be grounded with ground snaps located no further than five feet from either end.

### Cleaning

Please note that contact between the matting surface and any acid or alkali solvent is strictly prohibited (such as Benzene, Alcohol etc), this will result in the antistatic performance degrading. If cleaning is required, the matting may be wiped with a cloth coated in a neutral solution (such as water).

### Guidance on use

Matting materials have a tendency to shrink slightly when first unrolled. In applications where length is critical, allow the material to relax for at least 4 hours before cutting to size. Matting should always be trimmed with a sharp knife or razor blade.

### Cutting tolerances

Width  $\pm 6$ mm

Length  $\pm 6$ mm every linear foot of running material

### RoHS Compliance

None of the following materials are intentionally added in manufacturing this product: lead, mercury, cadmium, hexavalent chromium, polybrominated biphenyls (PBB) or polybrominated diphenyl ethers (PBDE) as outlined in the Directive 2002/95/EC Article 4.1.

To request a quotation or for more information, please call **+44 (0)1473 836200**  
email [info@antistat.co.uk](mailto:info@antistat.co.uk) or visit [www.antistat.co.uk](http://www.antistat.co.uk)

IMPORTANT: This data sheet and its contents (the "Information") belong to Antistat or are licensed to it. No licence is granted for the use of it other than for information purposes in connection with the products to which it relates. No licence of any intellectual property rights is granted. The Information is subject to change without notice and replaces all data sheets previously supplied. The Information supplied is believed to be accurate but Antistat assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any use made of it. Users of this data sheet should check for themselves the Information and the suitability of the products for their purpose and not make any assumptions based on information included or omitted. Liability for loss or damage resulting from any reliance on the Information or use of it (including liability resulting from negligence or where Antistat was aware of the possibility of such loss or damage arising) is excluded. © 2024 Antistat.

## TEST RESULTS

	TEST METHOD	UNIT	VALUE
Surface Resistance / $R_{TG}$	SJ/T10694-2004	Ohms	$1 \times 10^6 \leq R \leq 1 \times 10^9$
Bottom Resistance / $R_{TT}$	SJ/T10694-2004	Ohms	$1 \times 10^3 \leq R \leq 1 \times 10^6$
Volume Resistance	GB/T14437-97	Ohms	$1 \times 10^5 \leq R \leq 1 \times 10^8$
Thickness	YY-1001	mm	Permissible Tolerance +0.1
Temperature Resistance	YY-1001	°C	180 (Instantaneous Temp)
Temperature	N/A	°C	20-26
Relative Humidity	N/A	%	40-65

$R_{TG}$  is the resistance from one point on the mat's surface to the mat's ground point, and is the fundamental electrical test for a mat. A proper  $R_{TG}$  insures that a mat can conduct charge from a point on the surface to the mat ground point. The guideline in ESD STM-4.1 for  $R_{TG}$  is  $1 \times 10^6$  to  $1 \times 10^9$  Ohms. ANSI/ESD S-20.20 has an upper limit of  $<1 \times 10^9$  Ohms.

$R_{TT}$  is the resistance from one point on the mat's surface to another point. A proper  $R_{TT}$  insures the consistency of the mat's resistance properties. The ESD STM-4.1 guideline for  $R_{TT}$  is  $>1 \times 10^6$  Ohms.

PRODUCT CODE	DESCRIPTION	SIZE	COLOUR
082-0310	ESD Bench Matting - 3 Layer - Smooth	1.2m x 12m	Green
082-0312	ESD Bench Matting - 3 Layer - Smooth	1.2m x 12m	Blue
082-0317	ESD Bench Matting - 3 Layer - Smooth	600mm x 1200mm	Green
082-0318	ESD Bench Matting - 3 Layer - Smooth	600mm x 1200mm	Grey
082-0319	ESD Bench Matting - 3 Layer - Smooth	600mm x 1200mm	Blue
082-0320	ESD Bench Matting - 3 Layer - Smooth	1200mm x 1800mm	Blue
082-0321	ESD Bench Matting - 3 Layer - Smooth	1200mm x 1800mm	Grey

To request a quotation or for more information, please call **+44 (0)1473 836200**  
 email [info@antistat.co.uk](mailto:info@antistat.co.uk) or visit [www.antistat.co.uk](http://www.antistat.co.uk)

IMPORTANT: This data sheet and its contents (the "Information") belong to Antistat or are licensed to it. No licence is granted for the use of it other than for information purposes in connection with the products to which it relates. No licence of any intellectual property rights is granted. The Information is subject to change without notice and replaces all data sheets previously supplied. The Information supplied is believed to be accurate but Antistat assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any use made of it. Users of this data sheet should check for themselves the Information and the suitability of the products for their purpose and not make any assumptions based on information included or omitted. Liability for loss or damage resulting from any reliance on the Information or use of it (including liability resulting from negligence or where Antistat was aware of the possibility of such loss or damage arising) is excluded. © 2024 Antistat.