


PRODUCT

Pink antistatic gusset bag

Pink antistatic bags have the ability to dissipate a static charge to ground preventing static charge building up on the package or device.

The material is also antistatic and will not generate a charge when rubbed against other materials. These bags can be used to package/transport non-ESD sensitive devices within the ESD protected area.

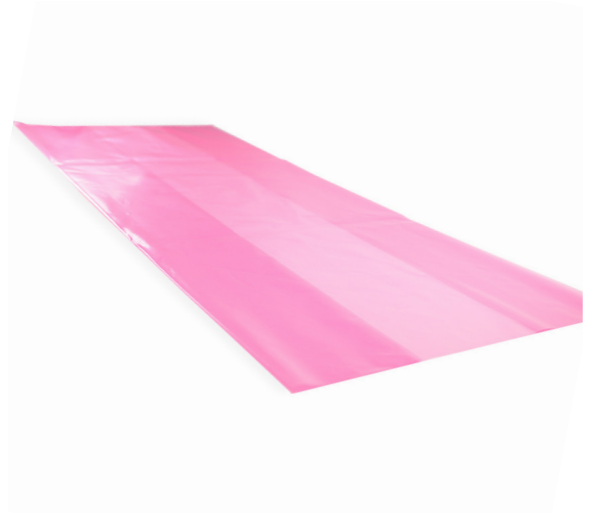

FEATURES

- Pink antistatic bags, blow moulded from LDPE with antistatic additives
- Soft texture and flexible
- Surface resistance of $<10^{10}$ Ohms

NOTES

These bags have no shielding ability. A static field or discharge occurring outside the bag could penetrate and damage electronics inside.



To request a quotation or for more information, please call **+44 (0)1473 836200**
email info@antistat.co.uk or visit www.antistat.co.uk

IMPORTANT: This data sheet and its contents (the "Information") belong to Integrity Cleanroom or are licensed to it. No licence is granted for the use of it other than for information purposes in connection with the products to which it relates. No licence of any intellectual property rights is granted. The Information is subject to change without notice and replaces all data sheets previously supplied. The Information supplied is believed to be accurate but Integrity Cleanroom assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any use made of it. Users of this data sheet should check for themselves the Information and the suitability of the products for their purpose and not make any assumptions based on information included or omitted. Liability for loss or damage resulting from any reliance on the Information or use of it (including liability resulting from negligence or where Integrity Cleanroom was aware of the possibility of such loss or damage arising) is excluded. © Integrity Cleanroom.

TECHNICAL SPECIFICATION

COMPONENT	TEST METHOD	VALUE
Film composition	N/A	LDPE
Film thickness	Micron Meter	3 mil 75 microm (+/-8%) (where applicable)
Surface resistance	ANSI/ESD S11.11.	>10 ¹⁰ Ohms
Density	ASTM D882	0.92 g/cm
Tensile strength	ASTM D882	MD: 32.01 MPa TD 33.75 MPa
Breaking elongation rate	ASTM D882	MD: 1200% TD 685%
Static dissipation	FTMS 101C Method 4046	<2 seconds
Appearance	N/A	Translucent Sheet (no powder and oil)
Size	N/A	Thickness: +10% Length: +10mm Width: 10mm

RoHS COMPLIANCE

- All of Antistat's products are RoHS and Reach compliant
- Amine Free
- Non corrosive
- Supports EN 61340-5-1 and can be used as part of an ANSI/ESD S20.20 programme

PRODUCT CODE	DESCRIPTION	SIZE (INCH)	SIZE (MM)	QUANTITY (per pack)
002-0017	Pink gusset bag	17 x 29 x 42	450 x 750 x 1080	20
002-0018	Pink gusset bag	29 x 39 x 47	750 x 1000 x 1200	10

To request a quotation or for more information, please call **+44 (0)1473 836200**
 email info@antistat.co.uk or visit www.antistat.co.uk

IMPORTANT: This data sheet and its contents (the "Information") belong to Integrity Cleanroom or are licensed to it. No licence is granted for the use of it other than for information purposes in connection with the products to which it relates. No licence of any intellectual property rights is granted. The Information is subject to change without notice and replaces all data sheets previously supplied. The Information supplied is believed to be accurate but Integrity Cleanroom assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any use made of it. Users of this data sheet should check for themselves the Information and the suitability of the products for their purpose and not make any assumptions based on information included or omitted. Liability for loss or damage resulting from any reliance on the Information or use of it (including liability resulting from negligence or where Integrity Cleanroom was aware of the possibility of such loss or damage arising) is excluded. © Integrity Cleanroom.