

PRODUCT

White Carrier Tape with Antistatic Cover Tape

DESCRIPTION


The following table outlines the typical values for dissipative black polystyrene product(s) produced at Antistat.

PROPERTY	TYPICAL VALUE	UNIT	TEST METHOD
Specific Gravity	0.87	g/cm3	ASTM D792
Haze (0.3mm sheet)	≥4.5	Kn/m	ASTM D638
Length	18 Inch		

PRODUCT CODE	SIZE	THICKNESS	QUANTITY
029-1081	8mm	0.5mm	500
029-1082	8mm	0.95mm	500

The Seal-Pack Heat Seal Activated Cover Tape is manufactured using Antistatic Polyethylene Terephthalate Film and other proprietary adhesive materials. The components for it's anti-static properties is from high polymers that eliminates the use of metallic elements.

COVER TAPE STRUCUTRE

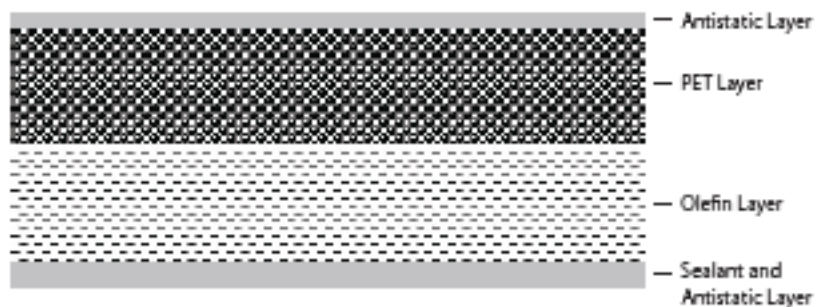

To request a quotation or for more information, please call **+44 (0)1473 836200**
email info@antistat.co.uk or visit www.antistat.co.uk

IMPORTANT: This data sheet and its contents (the "Information") belong to Antistat or are licensed to it. No licence is granted for the use of it other than for information purposes in connection with the products to which it relates. No licence of any intellectual property rights is granted. The Information is subject to change without notice and replaces all data sheets previously supplied. The Information supplied is believed to be accurate but Antistat assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any use made of it. Users of this data sheet should check for themselves the Information and the suitability of the products for their purpose and not make any assumptions based on information included or omitted. Liability for loss or damage resulting from any reliance on the Information or use of it (including liability resulting from negligence or where Antistat was aware of the possibility of such loss or damage arising) is excluded. © 2023 Antistat.

PROPERTY	ASTM METHODS	UNIT	TYPICAL VALUE
PERFORMANCE			
Thickness	Micro Gauge	um	55 +/-
MECHANICAL			
Tensile Strength	D638	Kgf/cm ²	650 +/- 50
Tensile Elongation	D638	%	75 +/- 5
Tear Strength	D1004	Kgf/cm	100 Min
Luminous Transmittance	D1003	%	90 +/- 5
Hazeness	D1003	%	10 +/- 2
ELECTRICAL			
Surface Resistance	ANSI/ESD STM11.13 - 2021	Ohms	10 ^{6~10} 9
Testing carried out at 23°C at both 12% and 50% RH.			

To request a quotation or for more information, please call **+44 (0)1473 836200**
 email info@antistat.co.uk or visit www.antistat.co.uk

IMPORTANT: This data sheet and its contents (the "Information") belong to Antistat or are licensed to it. No licence is granted for the use of it other than for information purposes in connection with the products to which it relates. No licence of any intellectual property rights is granted. The Information is subject to change without notice and replaces all data sheets previously supplied. The Information supplied is believed to be accurate but Antistat assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any use made of it. Users of this data sheet should check for themselves the Information and the suitability of the products for their purpose and not make any assumptions based on information included or omitted. Liability for loss or damage resulting from any reliance on the Information or use of it (including liability resulting from negligence or where Antistat was aware of the possibility of such loss or damage arising) is excluded. © 2023 Antistat.