

PRODUCT

Antistatic Cable Ties

TECHNICAL DATASHEET



A permanently static dissipative ESD safe cable tie, available in 2 sizes, suitable for a wide range of applications within ESD protected areas.

MATERIAL

Nylon

DIMENSIONS

· Length (Actual): 7.91"

• Bundle Diameter: 1/16" - 2.09"


SPECIFICATIONS

UL Flame Rating: 94V-2

Not plenum rated

TEMPERATURE

Performance: -40° to 185° F

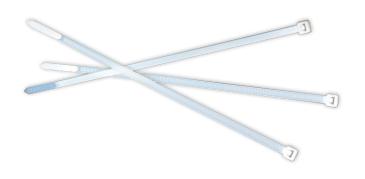

FEATURES

- ESD Safe
- · Ensures secure fixture
- Tamperproof
- Rated 107 to 108 Ohms Sq
- RoHS Compliant (contain no lead, cadmium, mercury, hexavalent chromium, polybrominated biphenyls (PBB) or polychlorinated diphenyl ethers (PCDE))
- Tensile Strength 50 lbs



PRODUCT CODE	DESCRIPTION	SIZE (INCHES)	COLOUR	QUANTITY
064-0001	Antistatic Cable Ties	0.19" x 8"	White	100 per pack
064-0002	Antistatic Cable Ties	0.10" × 6"	White	1000 per pack

To request a quotation or for more information, please call +44 (0)1473 836200 email info@antistat.co.uk or visit www.antistat.co.uk

IMPORTANT: This data sheet and its contents (the "Information") belong to Antistat or are licensed to it. No licence is granted for the use of it other than for information purposes in connection with the products to which it relates. No licence of any intellectual property rights is granted. The Information is subject to change without notice and replaces all data sheets previously supplied. The Information supplied is believed to be accurate but Antistat assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any use made of it. Users of this data sheet should check for themselves the Information and the suitability of the products for their purpose and not make any assumptions based on information included or omitted. Liability for loss or damage resulting from any reliance on the Information or use of it (including liability resulting from negligence or where Antistat was aware of the possibility of such loss or damage arising) is excluded. © 2024 Antistat.